


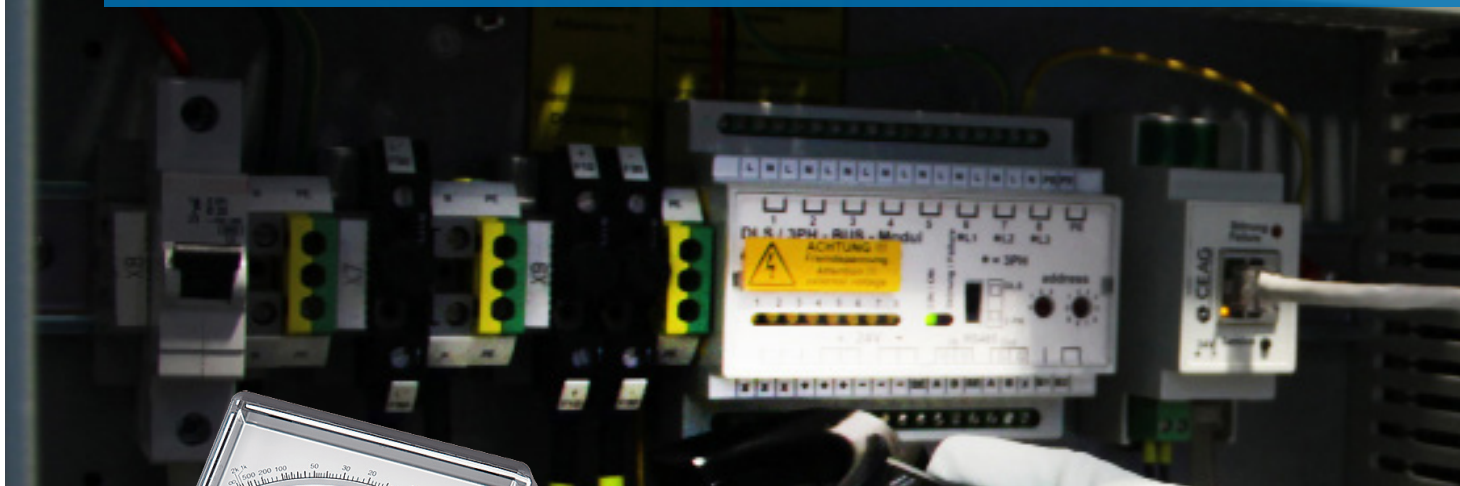

DC V AC V DC A  $\Omega$  dB

## Kyoritsu 1109S Multi Meter

### Features at a glance

- Mirrored scale for easy and accurate reading.
- Output terminal to cut off DC component when measuring AC voltage.
- Safety designed input terminals and test leads.

### Specifications

|              |                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------|
| DC V         | 0.1/0.5/2.5/10/50/250/1000V(20k $\Omega$ /V) $\pm$ 3% of FS                                                 |
| AC V         | 10/50/250/1000V(9k $\Omega$ /V) $\pm$ 3% of FS                                                              |
| DC A         | 50 $\mu$ A/2.5/25/250mA $\pm$ 3% of FS                                                                      |
| $\Omega$     | 2/20k $\Omega$ /2/20M $\Omega$ $\pm$ 3% of scale length                                                     |
| Decibel      | -10 - +62dB                                                                                                 |
| hFE          | 0 - 1000( $\Omega \times 10$ ) $\pm$ 3% of scale length                                                     |
| Power source | R6(AA)(1.5V) $\times$ 2, 6F22(9V) $\times$ 1                                                                |
| Dimensions   | 150(L) $\times$ 100(W) $\times$ 47(D)mm                                                                     |
| Weight       | 330g approx..                                                                                               |
| Accessories  | 7066A(Test leads), 8901(Fuse[0.5A/250V]) $\times$ 2, R6(AA) $\times$ 2, 6F22 $\times$ 1, Instruction manual |
| Optional     | 9168(Carrying case)                                                                                         |