

LMX200

Utility locating with GPR made simple

Trying to avoid dangerous and costly hits to critical utilities?

Want to find and map more utilities at your job site?

Non-metallic utilities without tracer wires giving you trouble?

If so, then LMX200™ is the right GPR for you.



Overview LMX200** GPR complements traditional pipe and cable locators and allows you to locate and map targets below the surface. Metal utilities, including pipes and cables Non-metallic pipes, including PVC and asbestos cement Concrete storm and sewer systems Utilities where installed tracer wiring has failed Underground storage tanks and drainage tiles Septic system components

Non-utility structures such as vaults, foundation walls

and concrete pads




LMX200 features


Rapidly locate metallic and non-metallic utilities

Enhance your productivity

Pinpoint Depth & Location



Easy Depth Calibration




No complex settings

– Just press Start and push the cart.

Use hyperbola-fitting to ensure accurate depth measurements and backup over the target to display its location and depth.


Color-coded field interpretations





Classify your targets in real-time by selecting a color option and touching the screen.

Increase your target confidence in the field with image optimization

Preset Filters









Dynamic Target Enhancement (DynaT)












Large



Optimize visibility of your targets with preset filters & gain.


Enhance small, medium & large targets.

Grids & Depth Slices




Flexible & guided grid collection

The LMX200 guides you through setup with pre-selected grid sizes. Stop lines early, or skip lines.



Obstacle avoidance


System guides data collection around an obstacle in your grid.



In-field Depth slices


Process grid data into depth slices and move down through your data to visualize targets at different depths. Depth Slice through multiple grids on-site.





SplitView – Real-time MapView during data collection

- Ensure full site coverage by visualizing your survey path
- · See interpretations as you add them
- Review data for subtle targets that you may have missed
- Know your location, and go back to areas of interest



Visualize your entire survey in MapView

- See your survey path, depth slices, field interpretations and flags
- · Slice through all depth slices simultaneously
- Toggle layers on and off to focus on elements of interest

Export geo-referenced data

1	Α	В	С	D	E	F
1	Tool	Position (m)	Depth (m)	Latitude	Longitude	GPS-Elevation
2	Point	0.72	0.18	38.8345202	-9.1821844	16.63
3	Point	0.83	0.7	38.8345201	-9.1821826	16.6
4	Point	1.12	0.75	38.8345187	-9.1821798	16.59
5	Point	1.63	0.19	38.8345172	-9.1821759	16.56
6	Point	1.63	0.68	38.8345172	-9.1821759	16.56


Spreadsheet (.CSV) file with flags and interpretations



KMZ output of lines, grid locations, interpretations, and screenshots

EKKO_Project[™] Software

Visualize, Understand and Report your GPR results with the optional EKKO_Project PC Software

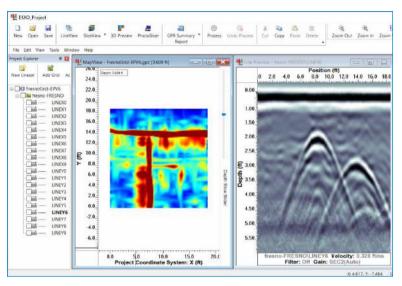








Core

Organize your GPR data, photos and other files and save as a single project file. Easily create PDF reports of your findings.







Examine (Cross-sections)

Reveal (Depth Slices)

3D Reveal (3D Visualization)

Weight & Dimensions					
Size: 100 x 70 x 115 cm (39.4 x 27.6 x 45.3 in)					
Weight: 22 kg (48 lbs)					
Display Unit size: 21 cm (8 in) diagonal					
Power					
12 volt sealed lead acid gel cell					
Battery Capacity: 9.0 Ah	Battery Weight: 3.6 kg (7.9 lbs)				
Battery Life: 4-6 hours	Charger: 110-240V				

Enviro	Environmental & Temperatures						
Rugged	Ruggedized, environmentally sealed unit and connections						
IP65	Operating temperature range: -40°C to +50°C (-104°F to 122°F)						
Regul	Regulatory Specifications						
Meets	Meets FCC 15.509, IC RSS-220 and ETSI EN-302066						
Data S	Storage	Depth					
380 km	n (236 miles) of data	Up to 8 meters (26 feet)					

Useful resources to make the most of your LMX:

- · LMX200 training videos
- · Utility Locating with GPR (Nulca-accredited) interactive and online course (SensoftU.com)
- · Webinars and free online resources
- · Learn more about our training offerings



Our Mission

Provide best in class equipment and solutions, to prevent damage to critical infrastructure, manage assets and protect lives.

Our Vision

To be the world's leader in the management of critical infrastructure and utilities.

Our Locations



USA

Raymond, ME Kearneysville, WV

Canada

Mississauga, ON



Europe

United Kingdom HQ France Germany The Netherlands



Asia Pacific

India China Hong Kong Indonesia Australia

Visit: www.sensoft.ca Follow us on: fin 💟 🗅











Copyright © 2023 Radiodetection Ltd. All Rights Reserved. Sensors & Software is a registered trademark of Radiodetection in the United States and/or other countries. Trademarks and Notices. The following are trademarks of Radiodetection: LMX, LMX200, DynaQ, DynaQ and Locate & Mark. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.