

UNI-T.

UT181 Series

True RMS Datalogging Multimeters



UNI-TREND TECHNOLOGY (CHINA) LIMITED

Tel: 400-8088-598

Email: info@uni-trend.com.cn

Http: www.uni-trend.com





EN 61010-1
EN 61010-2-033
EN 61326-1




NEW

Main Feature:

1. Display count 60000 (320X240 resolutions 3.5"TFT Color LCD display);
2. Support displaying multiple measurement results at the same time;
3. More than 10 measurements including: Voltage(AC/DC), Current(AC/DC), Resistance, Diode, Capacitance, Admittances, Frequency, Duty Cycle, Impulse Width, Dual-Temperature and etc;
4. True RMS response for AC Voltage and AC Current measurement with build-in low pass filter;
5. 100kHz bandwidth for AC voltage and AC current measurement, together with 10kHz bandwidth for AC voltage and AC current at AC+DC measurement mode;
6. Data logging up to 20k data set of memory; Data events include store, review, delete, plot in trend-diagram;
7. Other data events including Max, Min, and AVG;
8. Up to 20A current measurement (30 seconds of measurement time);
9. Standard USB cable for PC communication, and optional Bluetooth Adaptor (UT-D07A) for Smart Phone communication;
10. Rugged double molding and IP65 water proof industrial design;
11. Compatible with EN61010-1 safety rating at CAT III 1000V/ CAT IV 600V;
12. Power by 2000mAh Li-ion battery and recharge by included power adaptor.

Imaging as below:

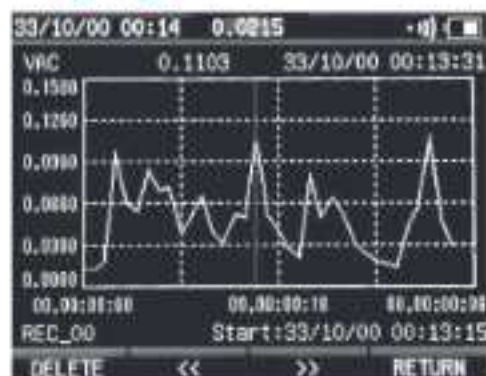

(1). Trend Capture Function



(2). Max/Mix/AVG Measure Function



(3). Data Logging Function



(4). Menu-Multi-Function selectable



EN 61010-1
EN 61010-2-033
EN 61326-1



NEW



UT-D07A

UT-D07A Bluetooth Adaptor

- Built-in Smart Bluetooth 4.0 Low Energy module
- Power by 2 x 1.5V AAA batteries
- Support iOS 6.0 or above and Android 4.0 or above
- Compliant to UT71/UT171/UT181 series digital multimeter



iDMM Smart Phone Application

iDMM is a smart phone application for data transferring or collecting for Uni-T brand DMM including UT71/UT171 and UT181 series digital multimeter. iDMM application can be download at both Apple store or Android store (<http://m.appchina.com/search/iDMM>).

Features of iDMM including the following:

1. iDMM support 3 operating model
 - a) Real-Time mode: transferring and data from support DMM to smartphone at sampling rate of the DMM;
 - b) Data logging mode: Log data transfer from DMM to smartphone at desire sampling set by the Smart Phone;
 - c) Data transfer mode: transfer the measurement data stored at the DMM to smartphone application.
2. iDMM also support 3 different views
 - a) List view: data is representing as a list of measurement result;
 - b) Landscape view: current measurement data at enlarge view;
 - c) Trend-Capture view: graphic representation to the measurement result.
3. Other features
 - a) Setting up sampling rate for data logging mode;
 - b) Email the store list data.





EN 61010-1
EN 61010-2-033
EN 61326-1



NEW



■ UT181A

SPECIFICATIONS

Specifications	Range	Best Accuracy
Model		UT181A
DC Voltage (V)	60mV/600mV/6V/60V/600V/1000V	$\pm(0.025\%+5)$
AC Voltage (V)	60mV/600mV/6V/60V/600V/1000V	$\pm(0.3\%+30)$
DC Current (A)	600 μ A/6000 μ A/50mA/600mA/10A	$\pm(0.08\%+10)$
AC Current (A)	600 μ A/6000 μ A/50mA/600mA/10A	$\pm(0.6\%+20)$
Resistance (Ω)	600 Ω /6k Ω /60k Ω /600k Ω /6M Ω /60M Ω	$\pm(0.05\%+2)$
Admittance (nS)	60nS	$\pm(2\%+10)$
Capacitance (F)	6nF/60nF/600nF/6 μ F/60 μ F/600 μ F/6mF/60mF	$\pm(2\%+5)$
Frequency (Hz)	10Hz ~ 60MHz	$\pm(0.01\%+5)$
Temperature ($^{\circ}$ C)	-40 $^{\circ}$ C ~ 1000 $^{\circ}$ C	$\pm(1\%+30)$
Temperature ($^{\circ}$ F)	-40 $^{\circ}$ F ~ 1832 $^{\circ}$ F	$\pm(1.5\%+50)$
Features		
Display Count		80000
Auto Range		✓
Manual Range		✓
True RMS		✓
Bandwidth (Hz)	100kHz	✓
AC+DC		✓
Lowpass Filter	1 kHz(-3db)	✓
dBV/dBm		✓
Continuity Buzzer		✓
Diode	Around 3V	✓
Duty Cycle	10% ~ 90%	✓
Dual Temperature Measurement	T1,T2, T1-T2, T2-T1	✓
Data Hold		✓
Peak Hold		✓
Relative Mode		✓
Data Logging	20000	✓
Trend Capture		✓
MAX/MIN/AVG		✓
Date Time Display		✓
Data Comparison		✓
Display Type	3.5 Inches 64k Color TFT LCD (320 * 240)	✓
LCD Backlight		✓
Simulate Sine		✓
USB Data Transport		✓
Mis-Plug Alarm		✓
Battery Indication		✓
Auto Power Off		✓
Charge Function		✓
Input Protection		✓
Input Impedance	Around 10M Ω	✓

GENERAL CHARACTERISTICS

Power	7.4V 2000mAh Li-ion Battery
LCD Size	70mm * 50mm
Product Color	Red and Grey
Product Net Weight	638 g
Product Size	103mm * 225mm * 50mm
Standard Accessories	Battery, Test Lead, Temperature Adaptor/Power Adaptor, Point Contact Temperature Probe x 2, CD Software, USB Cable
Standard Individual Packing	Giftbox, Carrying Bag, Manual, Warranty Card
Standard Quantity Per Carton	20 Pcs
Standard Carton Measurement	480mm * 385mm * 505mm (0.085 CBM Per Standard Carton)
Standard Carton Gross Weight	26.5 Kg
Optional Accessories	Bluetooth Adaptor (UT-D07)