

Depth Gage, Adjustable Angle

SERIES 950

FEATURES

- Head made of hardened steel.
- Base surface measures 2-1/2" x 1/8" thick.
- Includes 6" rule: 7/32" wide and .041" thick.
- Includes 6" rod: 3/32" diameter.

SPECIFICATIONS

Order No.	Protractor Graduation	Rule Graduation
950-271	30°, 45°, 60°	1/32", 1/64"



Zero-It

SERIES 950


"Zero-It" is specially designed for MITUTOYO Test Indicators with Dovetails, and functions as a quick and practical work positioning device.

Attach "Zero-It" directly to the collet, then zero in the work position by reading MITUTOYO


Test Indicator. The hardened clamping post consists of three ODs, from top, 1/4", 3/8" and 1/2", and has hardness of approximately 58 to 60 Rockwell C.

SPECIFICATIONS

Order No.	Coarse	Fine
950-110	10°	3/8"

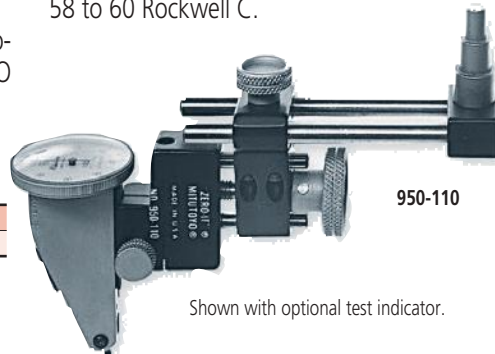

Shown with optional test indicator.

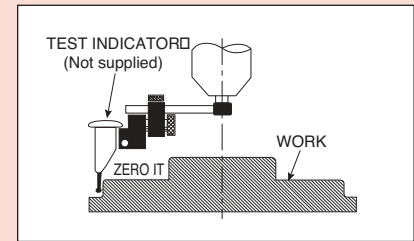

Zero-Setter

SERIES 950

Fast and sure establishment of "0" reference point with built-in indicator.

Spring loaded setting face to safe guard against damage from over run.

Body dia. 1.44" (36.5mm)

Wooden case included.

SPECIFICATIONS

Order No.	Height	Graduation
950-111	1"	.0005"
950-112	25mm	0.01mm



950-111